


g  
a  
b  
l  
e  
s  
e  
n  
g  
i  
n  
e  
e  
r  
i  
n  
g

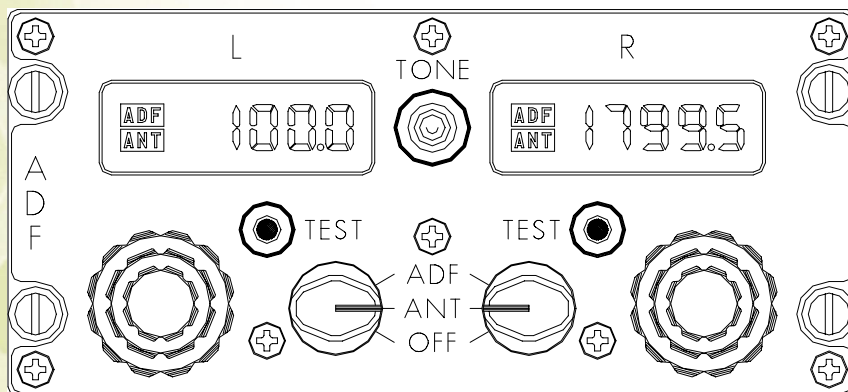

## G7403-01 Dual ADF Control Panel

### GENERAL SPECIFICATIONS

#### Dimensions

- 2.610 (height) x 5.735 (width) x 5.0 (depth) inches, excluding rear connectors

#### Weight

- 3.5 pounds (max)

#### Frequency/Channel Ranges

- The ADF frequency range is from 100.0 to 1799.5 kHz using 0.5 kHz spacing.
- The optional extended range is from 2100.0 to 2199.5 kHz using 0.5 kHz spacing.

#### Electrical Requirements

- Power ..... 115 VAC @ 400 Hz, 6.0 Watts (max)
- Panel Lighting (Incandescent White) ..... 0-5 VAC variable, 3.3 Watts (max)
- LCD Lighting (Incandescent White) ..... 0-5 VAC variable, 4.5 Watts (max)

#### Connectors

- J1: M83723-72R16246, or equivalent 24 pin connector
- J1 Mating: M83723-75R16246, or equivalent 24 pin connector
- J2: M83723-72R16249, or equivalent 24 pin connector
- J2 Mating: M83723-75R16249, or equivalent 24 pin connector

# G7403-01 Dual ADF Control Panel

## Color

- Front Panel – Boeing Brown BAC #8328
- Knobs – Boeing Beige BAC #8925
- Front Panel Plastic Markings – White FED STD 595b37875 (Futura Medium font)
- Push Buttons - Black FED STD 595b37038

## Compliance

- RTCA/DO-160C (Environmental), RTCA/DO-167, RTCA/DO-178B (Software), RTCA/DO-179 (ADF MOPS)
- ARINC 429, ARINC 712, ARINC 720

## Certification

- TSO-C41d
- B757, B767

## Features

- Two independent and electrically isolated sets of electronics
- Software upgrades through in-circuit programming
- ANT/ADF annunciation at the selector and the displays
- Liquid spill-proof design
- Built-in-test (BIT) capability
- Non-volatile storage of front panel settings
- Modular construction contributes to economical maintenance
- MTBF: 15,000 operating hours

### Gables Engineering Inc.

247 Greco Avenue, Coral Gables, Florida 33146

Tel: (305) 774-4400 • Fax: (305) 774-4465

[www.gableseng.com](http://www.gableseng.com)

Proprietary Information

4/25/01 • Rev. 02