


g  
a  
b  
l  
e  
s  
e  
n  
g  
i  
n  
e  
e  
r  
i  
n  
g

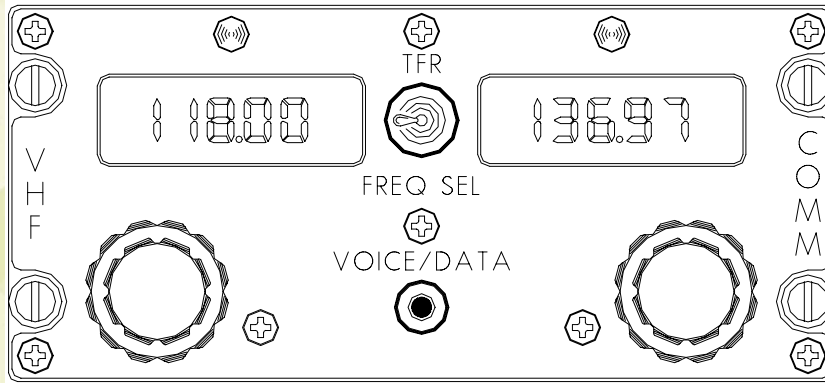

## G7400-28 VHF COMM Control Panel

### GENERAL SPECIFICATIONS

#### Dimensions

- 2.610 (height) x 5.735 (width) x 5.0 (depth) inches, excluding rear connector

#### Weight

- 2.0 pounds (max)

#### Frequency/Channel Ranges

- The default VHF frequency range is from 118.00 to 136.97 MHz using 25 kHz spacing (135.97 MHz if extended range is disabled, 136.990 MHz if 8.33 kHz spacing is selected).

#### Electrical Requirements

- Control Panel ..... 28 VDC, 7.0 Watts (max)
- Panel Lighting (Incandescent White) ..... 0-5 VAC variable, 3.3 Watts (max)
- LCD Lighting (Incandescent White) ..... 0-5 VAC variable, 4.5 Watts (max)

#### Connectors

- J1 Mating: MS24266R16B24S, or equivalent 24 pin connector



# G7400-28 VHF COMM Control Panel

## Color

- Front Panel – Boeing Brown BAC #8328
- Knobs – Boeing Beige BAC #8925
- Front Panel Markings – White FED STD 595b37875 (Futura Medium font)
- Push Button - Non-reflective Black FED STD 595b37038

## Compliance

- RTCA/DO-160C (Environmental), RTCA/DO-178B (Software), RTCA/DO-186 (VHF COMM)
- ARINC 429, ARINC 716, ARINC 720, ARINC 724B, ARINC 750

## Certification

- TSO-C37d, TSO-C38d
- B757, B767

## Features

- Variable rate tuning for rapid selection of 8.33 kHz channels
- DATA capable
- 8.33 kHz capable
- Liquid spill-proof design
- Built-in-test (BIT) capability
- Non-volatile storage of front panel settings
- Modular design provides flexibility for custom layouts
- Modular construction contributes to economical maintenance
- VDL Mode 2 upgradeable
- MTBF (Calculated): 20,000 operating hours

### Gables Engineering Inc.

247 Greco Avenue, Coral Gables, Florida 33146

Tel: (305) 774-4400 • Fax: (305) 774-4465

[www.gableseng.com](http://www.gableseng.com)

Proprietary Information

9/26/03 • Rev. 03